


Supplemental Information & Instructions for 542-077 Switch, Ignition w/o barrel Multiple Applications, 4 position operation

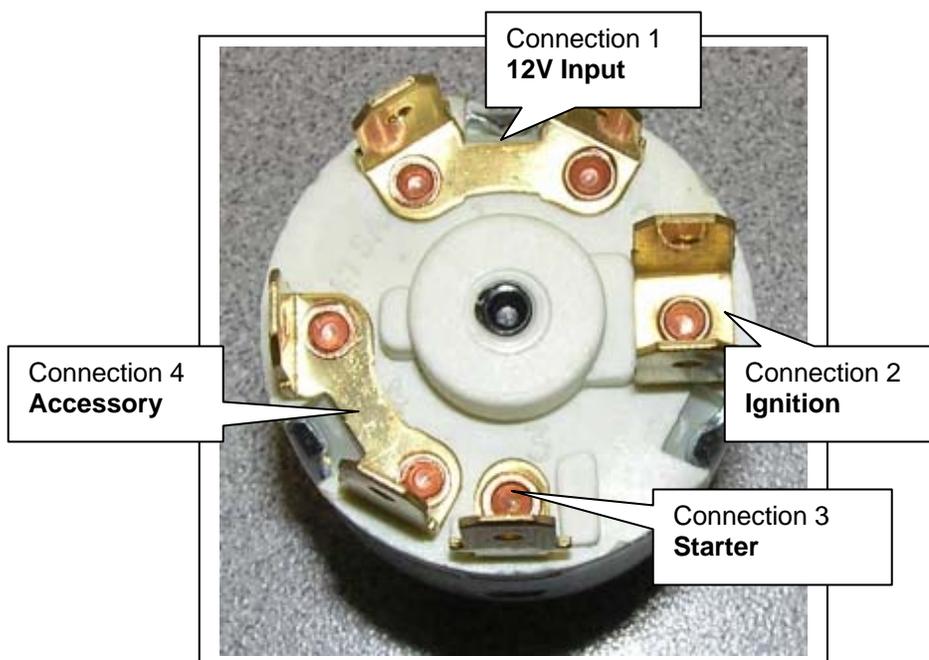

This switch has 3 positions and was originally supplied for Triumph applications. It is a good replacement for the original MG two position switch as it incorporates an Accessory position which is really useful for feeding a stereo and or 12 volt auxiliary outlet.

The operation is:

Position 1: Accessory

Position 2: Off

Position 3: Ignition + Accessory

Position 4: (spring loaded) Ignition + Starter

Wiring:

Connection 1: (two terminals) The 12 volt input. The brown hot lead is connected to one of these terminals. In some applications the brown feed to the headlamp circuit is connected to the other terminal.

Connection 2: (two terminals) The Ignition circuit. The white leads feeding the coil and fuse box are connected to these terminals.

Connection 3: (single terminal) The starter connection: The white lead with red stripe is connected to this terminal

Connection 4: (two terminals) The accessory circuit: This can be used to feed a stereo or other accessory.



Moss Motors, Ltd.

440 Rutherford Street, Goleta, California 93117

In the US & Canada Toll Free (800) 667-7872 FAX (805) 692-2510 (805) 681-3400

Moss Europe Ltd.

Hampton Farm Industrial Estate, Hampton Road West, Hanworth Middlesex, TW13 6DB

In the UK: 020-8867-2020 FAX:- 020-8867-2030

Instruction Sheet Moss MGL#_MEL# November 2006