

TR4 / 6 Emergency Hood Open Kit

Part # 807-088

This kit provides a back-up cable to your car's hood release for use if the original cable breaks.


To Install:

1. Locate an existing hole **(C)** in the passenger side bulkhead shelf, and feed the loose end of the cable through **(D)**.

NOTE: This hole is present in almost every TR, but if it is not, drill a 1/4" hole in the shelf or firewall and use the grommet supplied in the kit.

2. Leaving some slack so the cable hangs inside the car, loosen the existing cable stop **(A)** and thread the cable through together with the original cable, and tighten the cable stop screw.

3. Thread the cable stop in the kit over the end of the new cable and tighten it up close to the cable stop on the release lever.

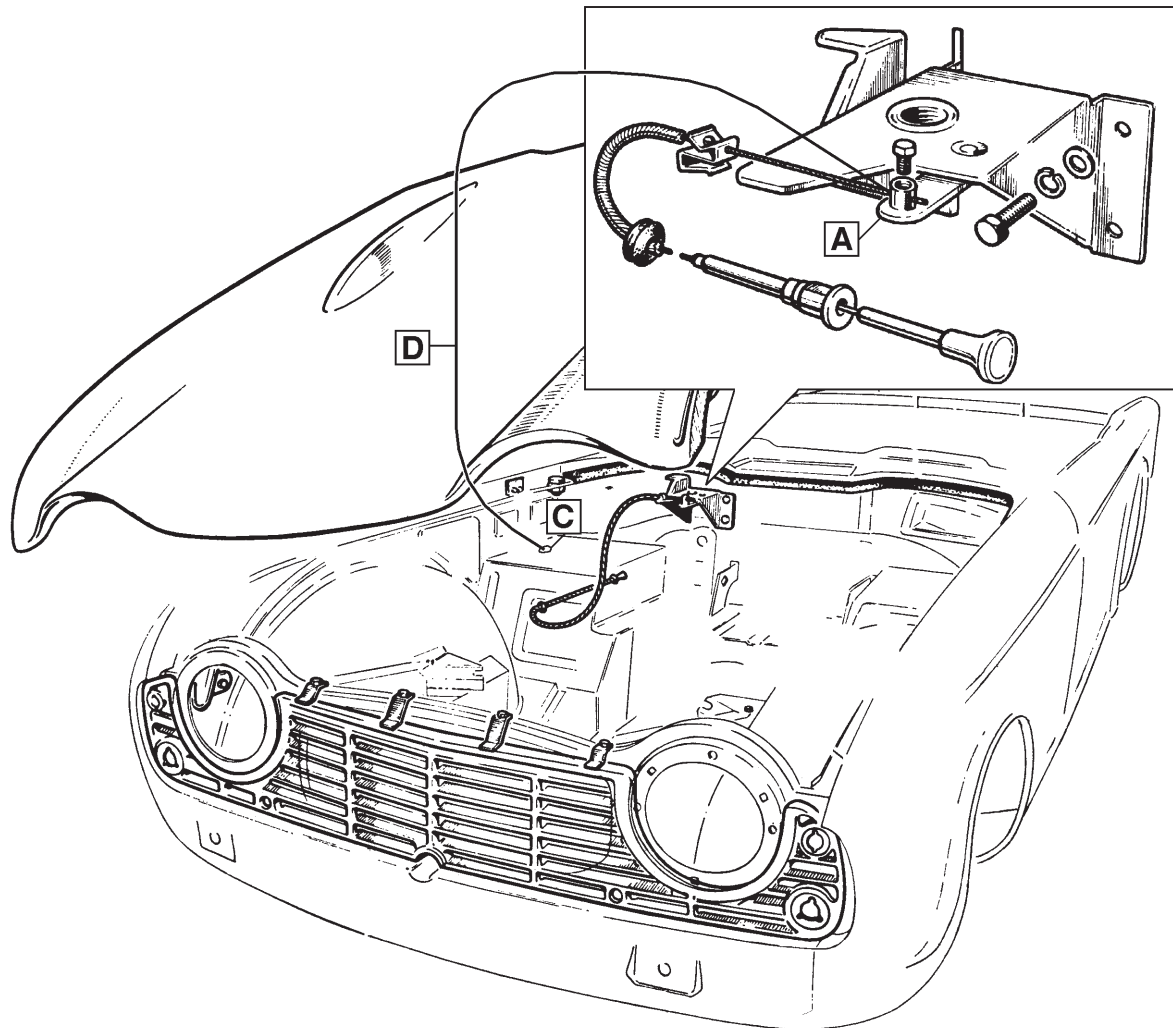

MOSS MOTORS, LTD.

P.O. Box 847 440 Rutherford Street Goleta, California 93117

(800) 235-6954 FAX (805) 692-2525

Instruction sheet #980-180 6/01